

hi-flow 1L & 2L

PART NO. 1L: FP2217, 2L: FP2122

GB

DESCRIPTION

Designed to collect condensate water from refrigeration and air conditioning units. Operating automatically when the float rises they discharge to a head of 4m.

The Hi-Flow will pump a greater volume of water than the Hi-Lift but to a lesser head.

IN THE BOX

- 1 x Hi-Flow 1L or 2L

SPECIFICATIONS

- Pump rating: 230V AC, 50W
- 1PH 50 Hz
- Volt-free alarm wires, N.C. contacts rated @ 3A at 230V
- Tank capacity: 1L or 2L
- Connecting cable: 2m
- Auto-resetting thermal cut-out, shaded pole motor
- In-line valve restricts back filling
- Incorporated back-plate for vertical mounting
- Pre-wired safety float switch
- Maximum water temperature: 40°C
- Continuously rated
- Class I appliance

Hi-Flow 1L:


- 140mm (h) x 235mm (w) x 140mm (d)
- Weight: 1.7kg

Hi-Flow 2L:

- 170mm (h) x 235mm (w) x 140mm (d)
- Weight: 1.75kg

PERFORMANCE

- Water flow rate: 288L/hr at zero head
- Maximum recommended head: 4m

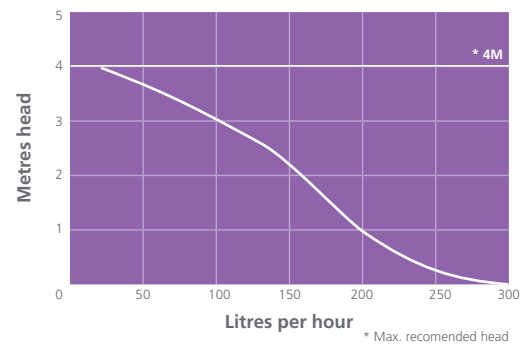

ELECTRICAL CONNECTIONS:

BROWN	:	LIVE
BLUE	:	NEUTRAL
GREEN/YELLOW	:	EARTH
2 X BLACK	:	SAFETY SWITCH