

mini tank pump

PART NO. FP1056

GB

DESCRIPTION

The pump is designed to collect condensate water from air conditioning systems and discharge it up to a recommended maximum 10 metres head. The internal safety switch is a low current switch to stop the air conditioning system in the event of pump failure. The pump is operated from an internal float switch.

INSTALLATION

- Small footprint tank pump
- Quick & easy to install

Our smallest ever tank pump. Designed for applications that require a larger capacity tank mini pump.

IN THE BOX


- 1 x Mini Tank Pump
- 1 x Mounting Bracket

SPECIFICATIONS

- 0.24L tank capacity
- Pump rating: 230 V AC, 19 W
- 1PH 50 Hz
- 3A alarm wires, normally closed
- Pre-wired safety switch: 3A maximum
- Double insulated (Class II appliance)
- 40°C maximum water temperature
- High level safety cut-out
- Wall, floor and in pan use
- 1m connecting cable
- Fire retardant plastics
- Inlet seal fits most standard overflow pipe sizes.
- 6mm outlet size
- IP67
- 70mm (h) x 180mm (w) x 90mm (d)
- Weight: 0.57kg

PERFORMANCE

- 50L/hr max. discharge
- Maximum recommended head: 10m
- 35 dB(A) @ 1m

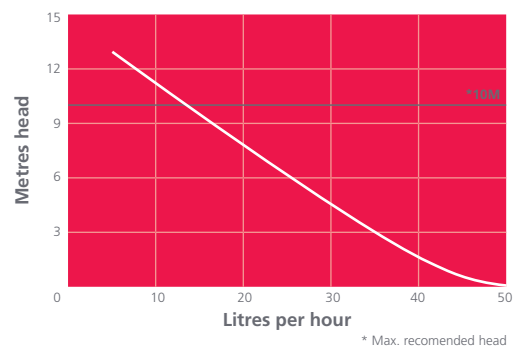

IMPORTANT

Not suitable for condenser boilers