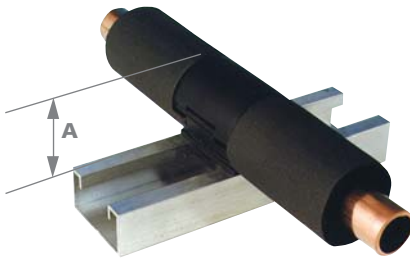


Size / Part no:

1/4"	B6445
3/8"	B6447
1/2"	B6444
5/8"	B6448
3/4"	B6446
7/8"	B6449
1 1/8"	B6442
1 3/8"	B6443
1 5/8"	B6538

Dimensions:


Type	Secures O/D of	Max unsupported span (m)	A (mm)	Weight (g)
1/4"	1/4"	1.5	21	16
3/8"	3/8"	1.5	24	18
1/2"	1/2"	1.5	27	20
5/8"	5/8"	1.5	31	23
3/4"	3/4"	1.5	34	24
7/8"	7/8"	1.0	37	26
1 1/8"	1 1/8"	1.0	43	30
1 3/8"	1 3/8"	1.0	50	35

Bag quantity: 10

Benefits:

- A complete range of 9 sizes to fit 1/4" to 1 5/8" O/D pipes
- Easy installation to 40mm x 20mm channel

- External diameter matches diameter of pipes with 9mm insulation
- Material withstands temperatures from -30°C to +135°C
- Excellent resistance to oil
- Twist & clip installation
- Suitable for both internal and external use
- Pipes and tubes can be securely assembled to strut channels
- Helps to dampen noise and vibrations
- Full insulation around pipe or tube

Materials of construction:

- A high grade engineering polymer, with modifier for high impact strength at low temperatures
- U.V. Stabilised

Typical properties:

- Tensile modulus 1900 MPa
- Flexural modulus 1800 MPa
- 1Z0D notched impact strength at -30°C 22KJ/m²
- Flammability UL94 thickness 1.6mm H.B
- Thermal Conductivity K= 0.28 w/m/degC



BBJ Quick Positioning Clips are a simple pipe clip made from a UV resistant plastic. They are fitted into standard unistrut channels by just a single twist.

The QPC's are ideal for smaller installations and can be used both externally and internally. They are tidy and give a professional finish to any installation. The thickness of the pipe clip is equal to the wall thickness of the insulation.