



AIR CONDITIONING



REFRIGERATION



HEATING



# cold cabinet

## CONDENSATE REMOVAL PUMP

A superior stainless steel refrigeration pump built to last. Designed to fit beneath refrigeration units, it pumps away defrost water and filters debris.



225L/h max. flow




35m max. rec. head (flow rate 10L/h)

### KEY FEATURES

- Top & side inlet options
- Large reservoir
- Stainless steel case
- Plug & play


### SUITABILITY

- Single and multiple refrigeration units, OEM
- ✓ **Perfect for...** Multiple refrigeration units

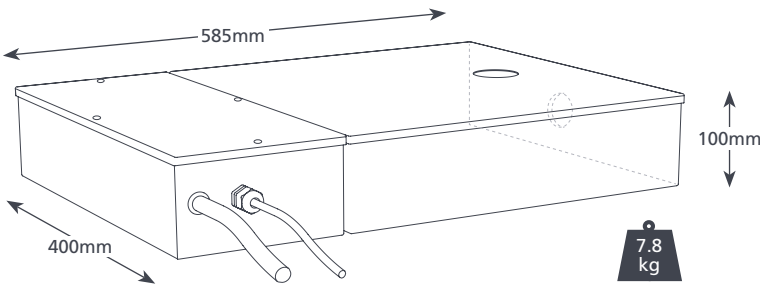

### COLD CABINET SPECIFICATIONS

Max. flow	225L/h @ 0 head
Max. rec. head	35m
Tank capacity	11L
Sound level@1m	60dB(A)
Power supply	230 VAC, 0.38A, 50/60Hz
Rated	Non continuous
Class	I appliance
Max. unit output	n/a
Max. water temp	40°C / 104°F
Inlet/outlet	50mm in, 10mm out
IP Protection	IP21
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

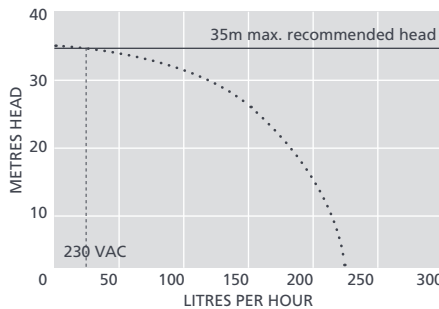

### SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 3/8" (10mm)	AX5101
StayClean Strips	FP1248

**Xtra** For more installation accessories take a look at our Aspen Xtra range

### COLD CABINET OPTIONS

Cold Cabinet – top inlet	FP2119
Cold Cabinet – side inlet	FP2120

\* Side inlet only

### IN THE BOX

Cold Cabinet pump • 2m Plug & play power cable • 1 1/2" BSP connector (for 40mm ID waste pipe)\* • Install manual

Download manual at [aspenspumps.com](http://aspenspumps.com)

Information correct at time of going to press.



[aspenspumps.com](http://aspenspumps.com)

+44 (0)1323 848842

[sales@aspenspumps.com](mailto:sales@aspenspumps.com)

reliable | silent | simple