



# Hot Water Economy

## CONDENSATE REMOVAL PUMP

The Hot Water Economy pump ensures efficient, quiet operation at high temperatures, handling demanding applications with ease. Built to withstand water temperatures up to 100°C, it's ideal for industrial and commercial air handling units.




900L/h max. flow



6m max. rec. head  
(flow rate 280L/h)



5.2  
kg

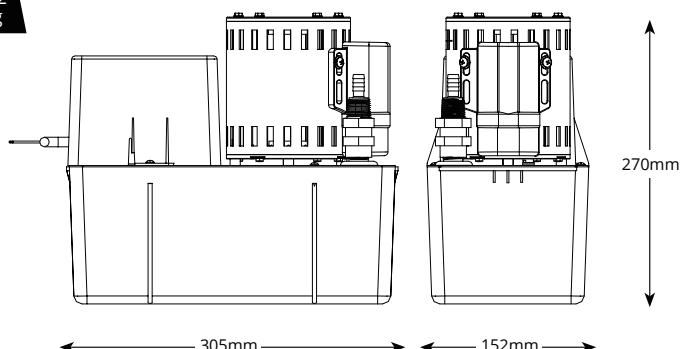

### Key Features

- High performance
- Handles 100°C water
- High level safety switch
- 40mm inlet


### Suitability

- Up to 1200kW / 4m Btu/h
- Humidifiers; refrigeration; air handling units (AHUs)
- **Perfect for...** Humidifiers



### HOT WATER ECONOMY @ 230 VAC 50Hz

Max. flow	900L/h
Max. rec. head	6m
Tank capacity	4L
Sound level@1m	64dB(A)
Power supply	230 VAC 50Hz 1.1A
Rated	Continuous
Class	I appliance
Max. ambient temp	40°C / 104°F
Max. water temp	100°C / 212°F
Inlet/outlet	40mm in, 10mm out
IP Protection	IP20
Safety switch	5.0A Normally closed

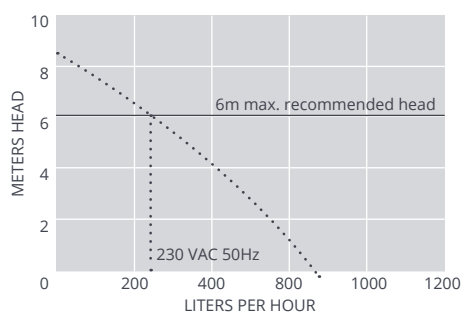

### HOT WATER ECONOMY OPTIONS

Hot Water Economy

FP2092/3

### SUGGESTED XTRA ACCESSORIES

Description	Part No.
Rubber Adaptor 3/4" (19mm) – 1 1/2" (38mm)	FP2007
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 3/8" (10mm)	AX5111



For more installation accessories take a look at our Aspen Xtra range

### IN THE BOX

Hot Water Economy Pump • Hard wired 2m power cable • Install manual

Download manual at [aspenpumps.com](http://aspenpumps.com)