



# ERRP

## CONDENSATE REMOVAL PUMP

Made of robust plastic, the lightweight ERRP (Economical Retail Refrigeration Pump) effectively pumps away defrost water and filters debris.



225 L/h max. flow




35m max. head  
(Flow rate 25 L/h)

### Key Features


- Easy to clean and carry
- Filter to catch debris
- Plug & Play

### Suitability

- Refrigeration units; cold store cabinets
- **Perfect for...** Multiple refrigeration units

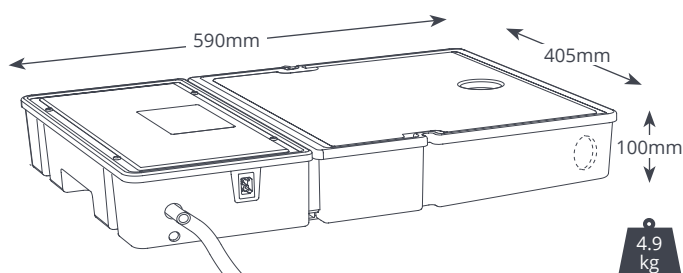

@ 230 VAC 50Hz	
Max. flow	225L/h @ 0m head
Max. recommended head	35m
Tank capacity	11L
dB(A) @1m	60 dB(A)
Power supply	230 VAC, 50-60 Hz, 0.2A
Rated	Non continuous
Class	I
Max. unit output	n/a
Max. water output	40°C (104°F)
Inlet/Outlet	50mm in 10mm out
IP Protection	IP24
Safety Switch	3.0A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

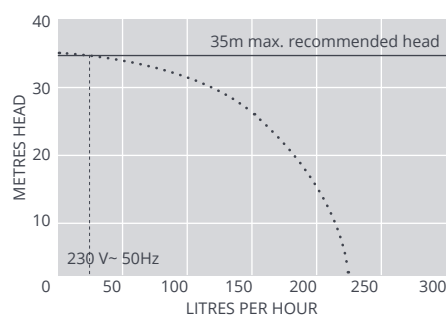

### OPTIONS

ERRP – side inlet FP2320

Download manual at [aspenpumps.com](http://aspenpumps.com)

### SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube to Soil Stack Adaptor	FP2038
Vinyl Tube Braided 3/8" (10 mm)	AX5101



For more installation accessories take a look at our Aspen Xtra range

### IN THE BOX

ERRP pump • 2m Plug & Play power cable  
• 11/2" BSP connector (for 40mm ID waste pipe)\* • Install manual