



# Compact

## CONDENSATE REMOVAL PUMP



The compact boiler pump uses piston technology and has an impressive head and flow. Ideal for domestic gas boilers and furnaces.



35L/h max. flow



15m max. rec. head  
(flow rate 10L/h)



### KEY FEATURES

- Compact & discreet
- High head
- Includes bracket for easy install
- Easy servicing


### SUITABILITY

- Up to 85kW / 290,000Btu/h with condensate PH value >2.7
- Domestic gas fired condensing boilers; High efficiency gas furnace

✓ **Perfect for...** Domestic gas fired condensing boilers & furnaces

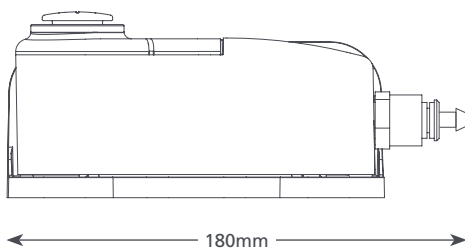


0.57 kg

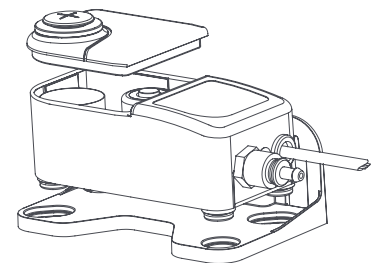

### COMPACT BOILER @ 230 VAC 50Hz

Max. flow	35L/h @ 0m head
Max. rec. head	15m
Tank capacity	0.24L
dB(A) @ 1m	35
Power supply	230 VAC, 0.1A, 50/60Hz
Rated	Non continuous
Class	II appliance <input type="checkbox"/>
Max. unit output	85kW / 290,000Btu/h
Max. water temp	60°C / 140°F
Inlet/outlet	27mm in, 6 & 10mm out
IP Protection	IP67
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	n/a

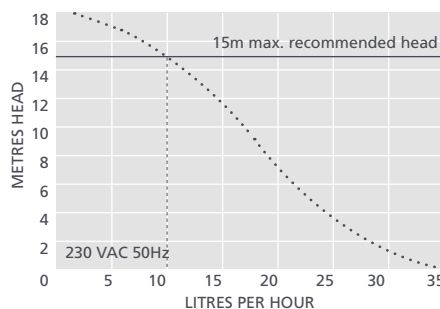

### SUGGESTED XTRA ACCESSORIES

Description	Part No.
Tube To Soil Stack Adaptor	FP2038
1 Amp Fuse	FP2620
Vinyl Tube Braided 3/8" (10mm)	AX5101
Acid Neutraliser	FP1021

**Xtra** For more installation accessories take a look at our Aspen Xtra range

### COMPACT BOILER OPTIONS

Compact boiler pump (UK)	FP2944
Compact boiler pump (EU)	FP2947

### IN THE BOX

Compact boiler pump (including hard wired 1m power cable) • Mounting Bracket • 6m discharge tube (6mm ID) • Pipe adaptor • Fixing kit • Install manual

Download manual at [aspenspumps.com](http://aspenspumps.com)

Information correct at time of going to press.