



Silent+ Mini Orange®

CONDENSATE REMOVAL PUMP

The world's best-selling mini pump is the quietest in its class! Thanks to an acoustic damper, anti vibration tubing & bracket, the Silent+ Mini Orange is whisper quiet.



12L/h max. flow



10m max. rec. head
(flow rate 6L/h)




19dB(A) @ 1 m

Key Features


- Quietest in its class
- Offener Behälter enthalten
- Submersible secondary reservoir included
- Plug & Play
- Anti siphon device

Suitability

- Up to 16kW / 54,000 Btu/h
- Ducted units; Floor standing & Chassis units; High wall mini split systems
- **Perfect for...** Smaller commercial and domestic units in quiet environments

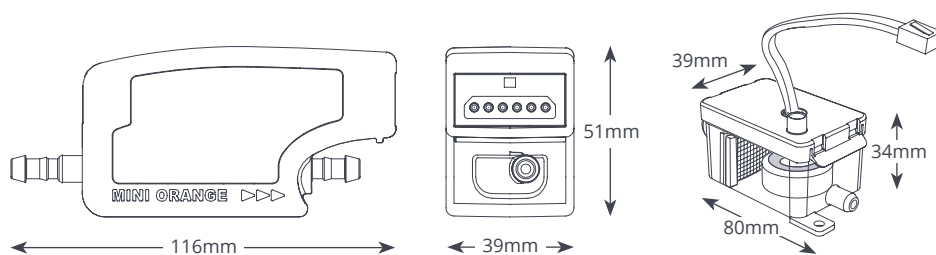

@ 230 VAC 50Hz	
Max. flow	12L/h @ 0m head
Max. rec. head	10m
Max. suction lift	2m
dB(A) @ 1m	19 dB(A)
Power supply	230 VAC, 50-60 Hz, 0.11A, 16 W
Rated Class	Non continuous II
Max. unit output	16kW (54,000 Btu/h)
Max. water temp	40°C (104°F)
Discharge tube	6mm ID
IP Protection	IP21
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	✓
Self priming	✓

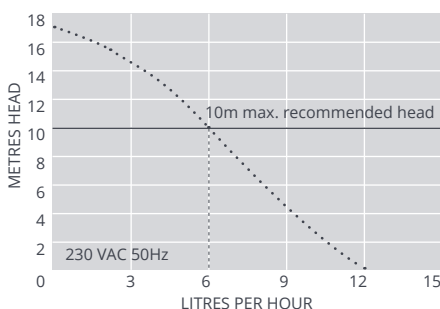

OPTIONS

Silent+ Mini Orange FP3313

† Pump only

- Download manual at aspenpumps.com
- Watch installation video at aspenpumps.com

SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Vinyl Tube Braided 1/4" (6mm)	AX5100



Visit aspenpumps.com for more installation accessories.

IN THE BOX

Silent+ Mini Orange pump • 1.5m Plug & Play power cable • Acoustic damper and 1m orange discharge tube with connector • Anti vibration bracket • Reservoir • Reservoir lid with 1.5m sensor cable • Submersible reservoir • Anti siphon device • Float & filter • 1.5m Suction tube 6mm ID • 220mm Orange inlet hose 14mm ID • 150mm Vinyl breather tube 6mm ID • Drain connector kit • Fixing kit • Install manual