


# Flare Connector Reducer Special

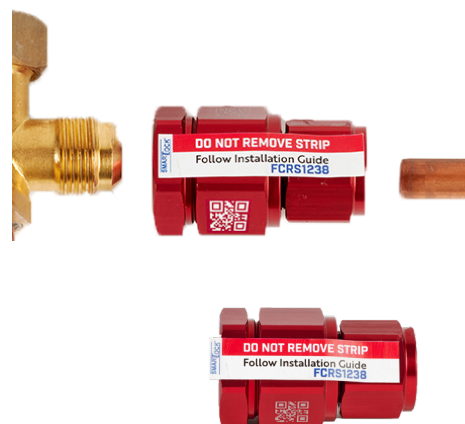

## KEY FEATURES

- Connecting smaller size tube to larger flare valve without flaring or brazing work.
- Specially designed to use multiple angle degrees (such as 37.5° and 45°) of flare valve.
- Compatible with all refrigerant gases.
- Positioning strip aligns all components for easy insertion of tube.
- Same fastening torque design for flare valve and small size tube.
- No limit on pressure and temperature range due to metal to metal sealing technology.
- Over torque prevention design.

## SPECIFICATIONS

Materials of construction

Aluminum alloy


## SIZING OPTIONS

Size

Code

1/2" - 3/8"

FCRS1238

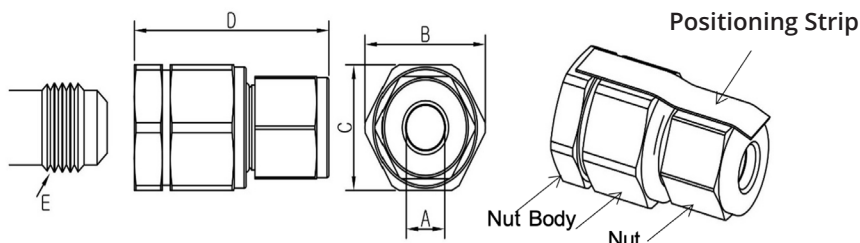

## DIMENSION - INCH (MM)

Model	A	B	C	D	E (Socket Size)
FCRS1238	0.375 (9.52)	1.063 (27.0)	0.945 (24.0)	1.917 (48.7)	1/2 Inch 3/4" - 16UNF

## COMPATIBLE WRENCH SIZES

Model	Flare Nut Size	Union Nut Size
FCRS1238	27 mm	22 mm

