



AIR CONDITIONING



REFRIGERATION



HEATING



Low Profile ERRP

CONDENSATE REMOVAL PUMP

Designed exclusively to fit underneath retail refrigeration cabinets the lightweight plastic ERRP (Economical Retail Refrigeration Pump) allows for the removal of defrost and contaminated water.



190L/h max. flow




21m max. rec. head
(flow rate 10L/h)

KEY FEATURES

- Lightweight & slim
- Easy to clean and carry
- Filter to catch debris
- Plug & play


SUITABILITY

- Refrigeration units; cold store cabinets
- ✓ **Perfect for...** Single & multiple refrigeration units

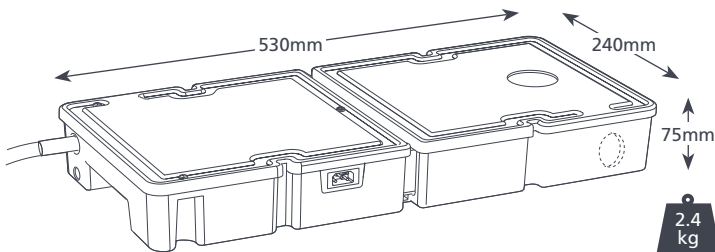

LOW PROFILE ERRP @ 230 VAC 50Hz

Max. flow	190L/h @ 0m head
Max. rec. head	21m
Tank capacity	3.5L
dB(A) @ 1m	60
Power supply	230 VAC, 0.2A, 50/60Hz
Rated	Non continuous
Class	I appliance
Max. unit output	n/a
Max. water temp	40°C / 104°F
Inlet/outlet	50mm in, 10mm out
IP Protection	IP24
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	n/a
Self priming	n/a

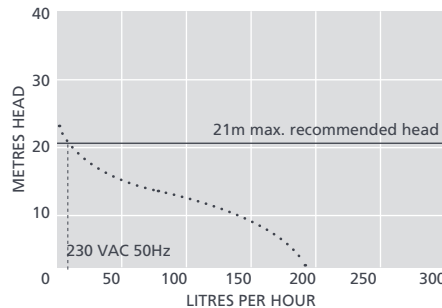

IN THE BOX

Low Profile ERRP pump • 2m Plug & play power cable • 1 1/2" BSP connector (for 40mm ID waste pipe) • Install manual

LOW PROFILE ERRP OPTIONS

Low Profile ERRP – top inlet FP2597

* Side inlet only

Download manual at aspenspumps.com

