









Micro-v ©

INTELLIGENT CONDENSATE REMOVAL PUMP

The award-winning Micro-v condensate removal pump with no breather tube, fits into the smallest of spaces. On-demand operation and floatless technology delivers silent running and a longer pump life.



14.5L/h max. flow



10m max. rec. head (flow rate 6L/h)



19dB(A) @ 1m

KEY FEATURES


- No breather tube
- Soft start
- Small multi orientation sensor

Micro-v i4 (Europe)

- Plug & Play
- Univolt

SUITABILITY

- Up to 19.3kW / 66,000Btu/h
- High wall split systems; Ducted units; Floor standing & Chassis units
- ✓ Perfect for... Installing directly inside the unit

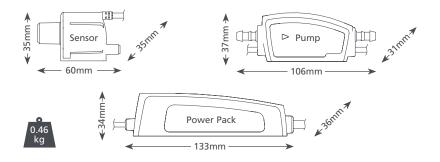

| 20 | |
|---------------------|--------------------------------|
| 18 | ***. |
| 16 | |
| ₹ 14 | |
| METRES HEAD 8 01 21 | ·. 10m max. recommended head |
| 끭 10 | 10. |
| ₩ 8 | |
| 6 | |
| 4 | |
| 2 | 100-250 VAC 50/60Hz |
| 0 | 3 6 9 12 15 LITRES PER HOUR |

| MICRO-V i ⁴ @ 100-250 VAC 50/60Hz | | | |
|--|--------------------------------|--|--|
| Max. flow | 14.5L/h @ 0m head | | |
| Max. rec. head | 10m | | |
| Max. suction lift | 2m | | |
| dB(A) @ 1m | 19 | | |
| Power supply | 100-250 VAC, 0.45A, 50/60Hz | | |
| Rated | Continuous | | |
| Class | II appliance \Box | | |
| Max. unit output | 19.3kW / 66,000Btu/h | | |
| Max. water temp | 40°C / 104°F | | |
| Discharge tube | 6mm ID | | |
| IP Protection | IP24 | | |
| Safety switch | 3.0A Normally closed | | |
| Thermal protection | ✓ | | |
| Fully potted | ✓ | | |
| Self priming | ✓ | | |

| SUGGESTED XTRA ACCESSORIES | | | | |
|--|---|----------|--|--|
| Description | | Part No. | | |
| Rubber adaptor | - | FP2002 | | |
| 90° long arm bend | | FP2006 | | |
| Tube To Soil Stack Adaptor | - | FP2038 | | |
| | | | | |
| For more installation accessories take | | | | |

a look at our Aspen Xtra range

IN THE BOX Micro-v i⁴ pump includes: Water sensor fitted with 850mm interface cable terminated with a plug (removable sensor bracket attached) • Adaptive pump fitted with 1m interface cable and 1m x 6mm violet tube (anti siphon device fitted) • Universal voltage power supply fitted with 200mm plug and play fly lead connected to 1.4m power cable combined power and high water level cores • AV Pump bracket & sleeve • 1 amp fuse • Inline filter • 90° elbow drain connector & fixing kit • Install manual Download manual at aspenpumps.com View install video at aspenpumps.com

GB DESIGNED

Information correct at time of going to press.

aspenpumps.com





FP1200

www.aspenpumps.com/i⁴.html