


















Split Bracket

In three size options our Split Bracket supports even the heaviest of condenser units.



KEY FEATURES


- 3 sizes to cover all applications. 60kg, 90kg & 140kg
- Galvanised steel & powder coated conforms to ISO 09227 corrosion test
- Heavy gauge for added strength
- Integrated spirit level for easy install
- High quality fixings supplied for secure installation
- Interlocking design part assembled for fast install
- Anti vibration pads as standard
- Bracket can be mounted using

horizontal wall bar, or directly to the wall as bracket arm pairs

- Easy levelling on uneven walls, with adjustable bolt
- Suitable for use with all Aspen Xtra Drip Trays

	SPECIFICATIONS								
Materials of construction		Galvanised steel (powder coated) Conforms to ISO09227							

		SIZING OPTIONS							
Description	Max. Load	Height (mm)	Crossbar Width (mm)	Depth (mm)	Gauge	Part No.			
Split Bracket 60kg	60kg	350	800	450	1.8mm	B6383			
Split Bracket 90kg	90kg	350	800	550	1.8mm	B6384			
Split Bracket 140kg	140kg	450	850	550	2.0mm	B6385			

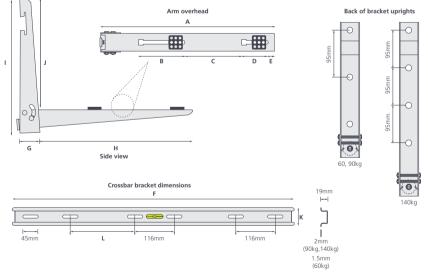

	mm (inches)											
Max Load	А	В	С	D	Е	F	G	н	1	J	К	L
60kg	450	105	165	74	15	800	55	405	350	285	55	180
(132lbs)	(17 ¾)	(4 1/8)	(6 ½)	(2 %)	(%)	(31 ½)	(2 ½)	(15 %)	(13 ¾)	(11 ¼)	(2 ½)	(7 1/8)
90kg	550	105	165	74	15	800	55	505	350	355	55	180
(198lbs)	(21 %)	(4 1/8)	(6 ½)	(2 %)	(%)	(31 ½)	(2 ½)	(19 %)	(13 ¾)	(14)	(2 ½)	(7 1/8)
140kg	550	105	235	95	15	850	65	500	450	375	55	205
(309lbs)	(21 %)	(4 1/8)	(9 ¼)	(3 ¾)	(%)	(33 ½)	(2 ½)	(19 %)	(17 ¾)	(14 ¾)	(2 ½)	(8 1/s)



Built in wall bar spirit level



Hinged bracket arms for fast installation



Easy assembly continues our tradition of quick installation



Advanced Crossbar allows for even faster installation



Adjustment bolt provides up to 5 degrees of correction



Adjustable anti-vibration cushions with captive nut



xtra@aspenpumps.com

For further details please refer to our website aspenpumps.com

Information correct at time of going to press







