



Macerator 4L

Part No: FP2305

ASPEN-5/09

Dimensions:

Height: 230mm
Width: 335mm
Depth: 150mm
Weight: 3.8kg

Power Supply:

Power supply: 230V, 0.38A

Electrical Connections:


Brown: Live
Blue: Neutral
Green/yellow: Earth
2 x Black: Safety switch

Other Features:

- Plastic tank
- Tank capacity: 4ltr
- Self-priming
- Connecting cable: 2m
- Pre-wired safety switch 4.0A max
- Outlet size: 10mm
- 2 inlet positions in deck:
40mm \varnothing & 55mm \varnothing

Performance:

- Water flow rate:
780 litres per hour maximum
- 8.5m discharge head

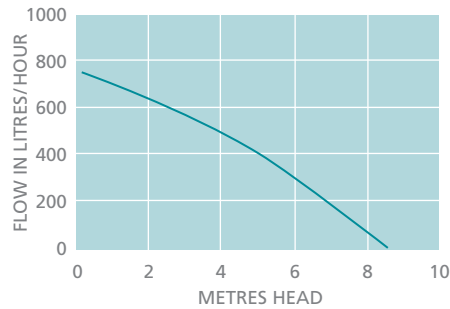

Service Guide:

Flush the pump thoroughly with anti-bacterial wash every 6 months to avoid sludge build-up in the pump housing.



The Macerator pump is designed to collect condensation and defrost water from food hall cabinets.

It has an internal macerator blade to stop the pump from clogging with food debris between maintenance visits and will discharge the water to a head of 8.5 metres.

The internal pre-wired safety float is a low current switch to stop the drain down cycle in the event of pump failure. The pump is operated via two internal float switches.



Apex Way Hailsham
East Sussex BN27 3WA
T: +44 (0)1323 848842
F: +44 (0)1323 848846
sales@aspenspumps.com
www.aspenpumps.com