



Mini Blanc®

CONDENSATE REMOVAL PUMP

The 'ultra quick fit' Mini Blanc is designed to be fitted beneath high wall indoor units and offers easy access for future maintenance.



12L/h max. flow



10m max. rec. head
(flow rate 4L/h)






21dB(A) @ 1 m

Key Features

- Extra quick to fit
- Compact & discreet
- Clear removable reservoir
- Ultra quiet operation
- Elegant and stylish casing


Suitability

- Up to 16kW / 54,000Btu/h
- High wall split systems
- **Perfect for...** Domestic use – where easy maintenance is key

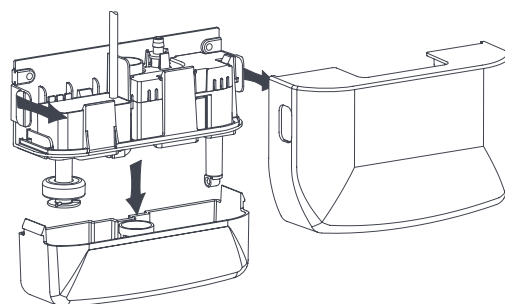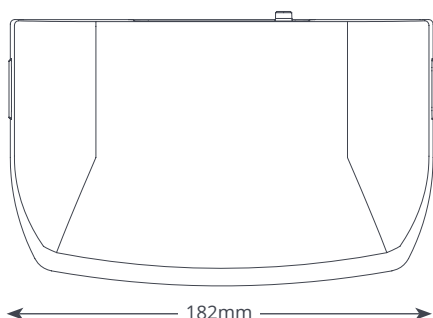

@ 230 VAC 50Hz

Max. flow	12L/h @ 0m head
Max. rec. head	10m
Tank capacity	0.24L
dB(A) @ 1m	21dB(A)
Power supply	230 VAC, 50-60Hz, 0.11A, 19W
Rated	Non continuous
Class	II
Max. unit output	16kW (54,000 Btu/h)
Max. water temp	40°C (104°F)
Inlet/outlet	20 mm in 6 mm out
IP Protection	IP21
Safety switch	3.0A Normally closed
Thermal protection	✓
Fully potted	Partially
Self priming	✓

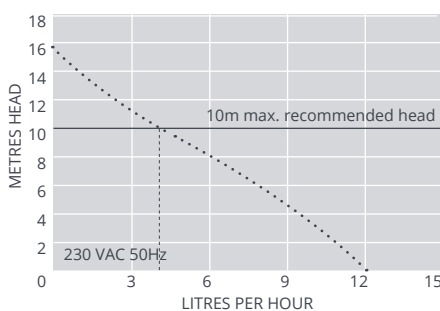

OPTIONS

Mini Blanc (Europe)

FP1080/2

SUGGESTED XTRA ACCESSORIES

Description	Part No.
1 Amp Fuse	FP2620
Tube To Soil Stack Adaptor	FP2038
Mini Blanc Cover (Ivory)	FP1037



Visit aspenpumps.com for more installation accessories.

IN THE BOX

Mini Blanc pump (including hard wired 1m power cable) • Anti siphon device • Drain connector kit • Fixing kit • Install manual

Download manual at aspenpumps.com

Watch installation video at aspenpumps.com